

## Hassle-Free Display Management and Security

With cloud features, BenQ DMS combined Device Info and Management, Apps Management and OTA (Over-the-Air) Update to provide you an ultimate device management solution for your productivity.



### More Feature



#### Device Info and Management

Remotely control your displays with DMS Cloud via Internet. It's an effective way to lower TCO and energy consumption for your operation.



#### Apps Management

Install Android™ apps for a selection of displays through our cloud server. DMS Cloud is designed to save you the hassles of repetitive manual installation work.



#### OTA (Over-the-Air) Update

Upgrade the latest BenQ firmware for your displays through our OTA Update support and keep them running smoothly at all times.

#### DMS Local

DMS Local is a Device Info and Management software based on windows OS. For users who would like to control your displays remotely via LAN, you can download DMS Local software for your operation.

#### MDA (Multiple Display Administrator)

For users who would like to control your displays remotely via RS232, you can download MDA software for your operation.


#### McAfee Embedded for Maximum Security

BenQ Interactive Flat Panels are embedded with McAfee for maximum security. McAfee offers device security with Real-time protection, Deep Scan, WebBrowsing Security, and Wi-Fi Security functions. To ensure data security, McAfee provides Privacy Check, APP Access Protection, and Hidden APPs features.


Model	CP6501K	CP8601K
<b>Panel</b>		
Screen Size	65"	86"
Backlight / Lightsource	DLED	DLED
Resolution (Pixel)	UHD 3840 x 2160 pixels	UHD 3840 x 2160 pixels
Brightness (Typical)	320nits	350nits
Contrast Ratio (Typical)	5,000:1	1,200:1
View Angle (Horizontal / Vertical)	178°/178°	178°/178°
Response Time (ms)	8ms	8ms
Color Gamut (x% NTSC)	68%	68%
Light Life (Typical)	30,000 hours	30,000 hours
Display Orientation	Landscape / Portrait	Landscape
<b>Glass</b>		
Tempered Glass	3mm Tempered Glass	3mm Tempered Glass
Anti-Glare & Germ-Resistant Screen	AG75	AG75
<b>Touch</b>		
Touch Technology	P-CAP	P-CAP
Numbers of Touch / Resolution	Up to 20 points Multi-touch	Up to 20 points Multi-touch
Touch interface	USB B Touch Port x2	USB B Touch Port x2
<b>Connectivity &amp; Sensor</b>		
Connector	VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1	VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1
Built-in Camera	FHD Camera x1	FHD Camera x1
Built-in Microphone	Array Microphone x6	Array Microphone x6
Built-in speaker	Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)	Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)
Sensor	NFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, Light Sensor x1, IR sensor x1	NFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, Light Sensor x1, IR sensor x1
<b>Power</b>		
Voltage	AC 100-240V~ 50/60Hz	AC 100-240V~ 50/60Hz
Typical (Watt)	210W	350W
<b>Mechanical</b>		
Weight (Without / With Packing) (kg)	43.2/ 58.5 kg	71.5 / 97.9 kg
Dimension (WxHxD) (mm)	1503×909×85	1962×1167×85
Wall Mounting (VESA) (mm)	4 holes (600 x 400mm) Screw M8 x25mm	4 holes (800 x 600mm) Screw M8 x25mm
Handle	x2	x2
<b>OSD</b>		
On-Screen Display Languages	English / French / German / Dutch / Polish / Russian / Czech / Danish / Swedish / Italian / Romanian / Finnish / Norwegian / Greek / Hungarian / Spanish / Portuguese / Traditional Chinese / Simplified Chinese / Arabic / Japanese / Thai / Persian / Vietnamese / Korea / Turkey / Indonesia (27L)	English / French / German / Dutch / Polish / Russian / Czech / Danish / Swedish / Italian / Romanian / Finnish / Norwegian / Greek / Hungarian / Spanish / Portuguese / Traditional Chinese / Simplified Chinese / Arabic / Japanese / Thai / Persian / Vietnamese / Korea / Turkey / Indonesia (27L)
<b>Package / Accessory</b>		
Remote Controller (with 2.4G dongle & Battery)	x1	x1
Power Cord	By Region	By Region
Cable	VGA(5m) x1, HDMI(1.5m) x1, USB for touch (3m) x1	VGA(5m) x1, HDMI(1.5m) x1, USB for touch (3m) x1
Quick Start Guide	x1	x1
User's Manual Electronic File	x1	x1
Touch Pen	x2	x2
Wall Mount	x1	x1
<b>Optional</b>		
Optional Accessory	InstaShow, WiFi Dongle, OPS, Trolley	InstaShow, WiFi Dongle, OPS, Trolley

# Dimension (mm)


CP6501K

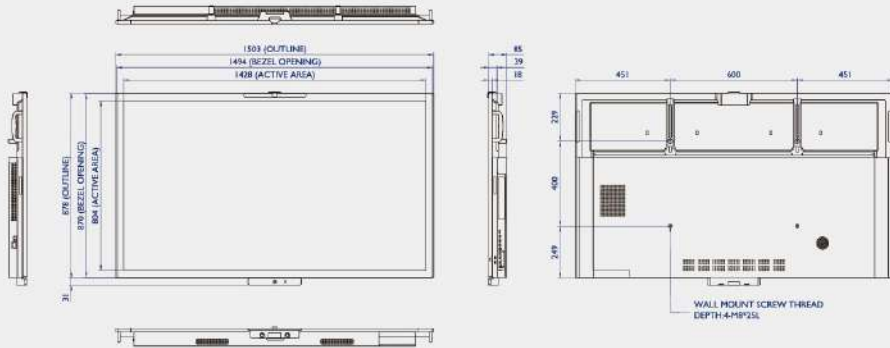

CP8601K

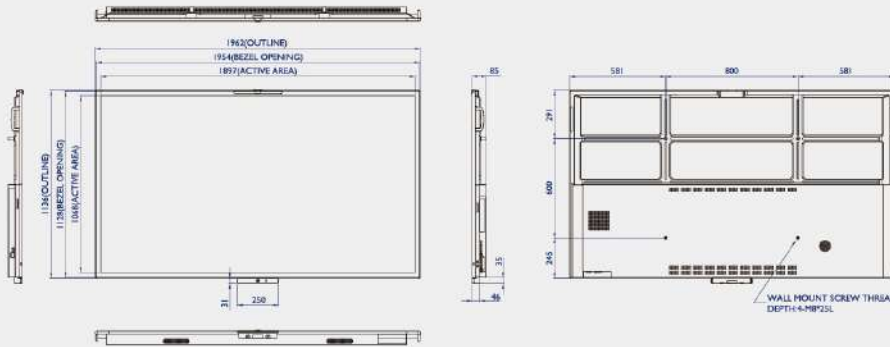

## Input/output terminals

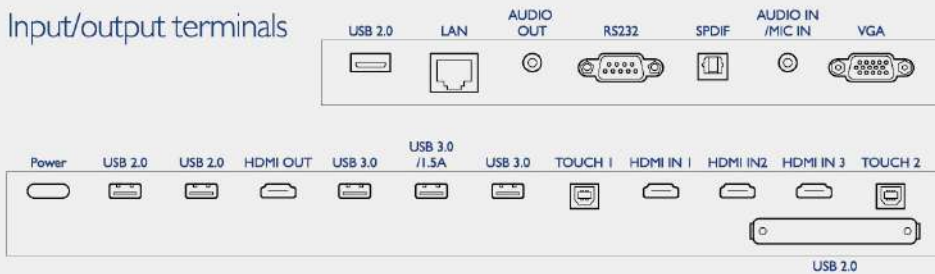

- a Microphone.
- b Turn the display on or off.
- c Press to open SwitchQ, a task switcher to switch between recent apps and inputsources.
- d Direction key. Press for upward selection.
- e Direction key. Press for left selection.
- f Press to proceed.
- g Android system main screenbutton.
- h Volume up/down.
- i Press to activate the spotlight pointer function and following theinstruction on the screen.
- j Press to open or close the OSD menu.
- k Direction key. Press for right selection.
- l Direction key. Press for downward selection.
- m Return key.
- n Voice command key. Press to activate Saffi (BenQ Voice Assistant), hold the button for two seconds,then say the command you can use. Release thebutton until you finish the command.
- o Freeze screen.
- p One key for blank screen.